


QR8 系列手动转阀 Series manual turning valves




图形符号 Graphical symbols

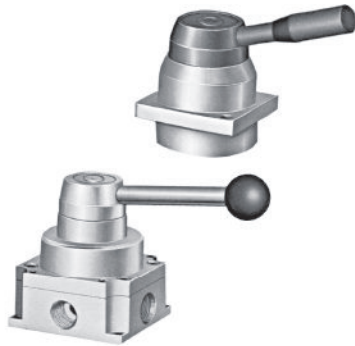

产品特点 Features

- 安装灵活，可直接安装在管线上，也可安装在控制的面板上
- 易损件少，耐磨，使用寿命长
- 各种规格都有侧接式(接口螺纹在侧面)和底接式(接口螺纹在底面)两种以供用户选用
- Flexible installation, either fitted directly in the line or on the control panel.
- Few consumables, long durability and long working life.
- Side connection (connection threads on the side) and bottom connection (connection threads in the bottom) are available for all specifications for use's option.

型号注释 Note for type

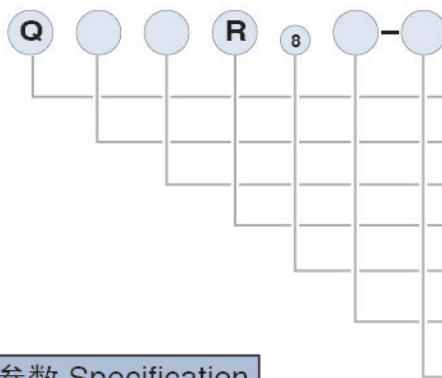


空气介质	Air medium
工作位置数	Qty of working position
通路数	Ways
手动控制	Manual control
8: 手柄转阀	8: Turning valve with handle
X: 中泄式 F: 中封式	X: middle exhaust F: middle closed
接管螺纹	Connection threads

技术参数 Specification

接管螺纹 Size of port	M5	G1/8	G1/4	G3/8	G1/2	G3/4
工作介质 Working medium	经净化的压缩空气 Cleaned compressed air					
最大工作压力 Max working pressure(MPa)	1.0					
耐压 Pressure bearing(MPa)	1.5					
使用温度 Working tempt(°C)	5~60					
最大转动角度 Max angle of turning(°C)	90					
有效截面积S值 Effective sectional area S value(mm²)	3	15	17	50	55	55

外形尺寸 Outlook & Dimension

Q24R8-G1/8, G1/4
Q34R8-G1/8, G1/4

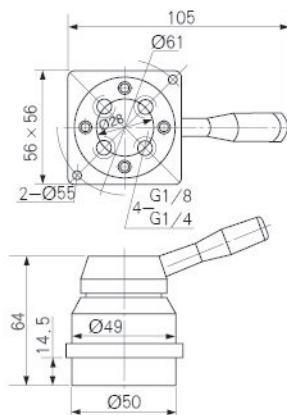

Q24R8-G3/8, G1/2, G3/4
Q34R8-G3/8, G1/2, G3/4

